

CSS ID Selector

- ◆ The id selector is used to specify a style for a single, unique element.
- ◆ Id selector is represented by '#' symbol (# Id Name)
- ◆ Id Selectors are used as a base for descendant selectors.

Example:

```
#para1 {  
    text-align: center;  
    color: red;  
}
```

Sample Code:

```
<!DOCTYPE html>

<html>

  <head>

    <style>

      #para1

      {

        text-align: center;

        color: blue;

      }

    </style>

  </head>

  <body>

    <p id="para1"> <b>Wikitechy is enhanced for learning, testing, and
training</b>

    </p>

    <p>Normal Paragraph</p>

  </body> </html>
```




Code Explanation:

```
<!DOCTYPE html>
<html>
  <head>
    <style>
      #para1 ← 1
      {
        text-align: center; ← 2
        color: blue; ← 3
      }
    </style>
  </head>
  <body>
    4 → <p id="para1"><b>Wikitechy is
      enhanced for learning,
      testing, and training<b>
    </p>
    <p>Normal Paragraph</p>
  </body>
</html>
```

- 1** In this above example, id selector is declared as “**#para1**” which is the id attribute value being called by hash symbol(#) followed by the id name.

- 2 Using **text-align property** we have assigned the text ("**Wikitechy is enhanced for learning, testing, and training**") to display in the **center** of the web page.
- 3 **color:blue;** defines the text ("**Wikitechy is enhanced for learning, testing, and training**") to be displayed in blue color .
- 4 **<p id="para1">** using the id name (#para1) , the styles declared in the para id will be applied to that paragraph with its font style as Bold.

Output:

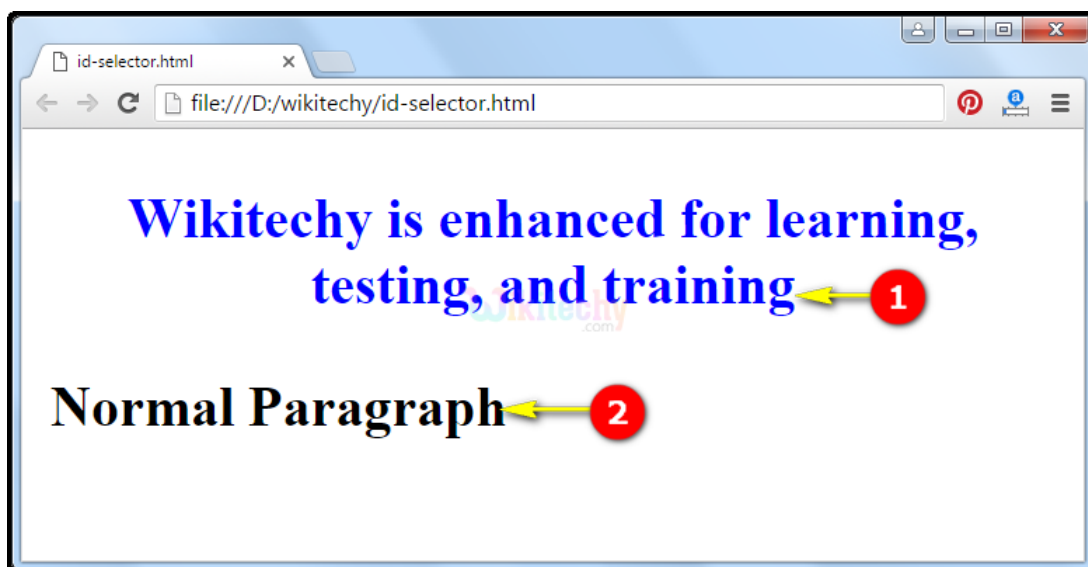

- 1 The text "**Wikitechy is enhanced for learning, testing, and training**" will be displayed in blue color with its alignment as center.
- 2 This is just a normal paragraph which does not have any css styles, so simply it displays the text "Normal Paragraph".