

[attribute~="value"] Selector

- ◆ [attribute~="value"] - selects specific elements whose attribute contains the specific value.

Example:

```
[title~="wikitechy"]  
  
{  
    border: 5px solid yellow;  
}
```



Sample Code:

```
<!DOCTYPE html>

<html>

<head>

<style>

    [title~=wikitechy]

    {

        border: 5px solid black;

    }

</style>

</head>

<body>

</body>

</html>
```



Code Explanation:


```
<!DOCTYPE html>
<html>
  <head>
    <style>
      [title~=wikitechy] ← 1
      {
        border: 5px solid black; ← 2
      }
    </style>
  </head>
  <body>
     ← 3
  </body>
</html>
```

- 1** `[title~="wikitechy"]` - Selects all title elements whose title attribute contains the word "wikitechy".



- 2 Border property is used to display a border around an element. Here we have applied border for an image. **border: 5px solid black** represents the border with 5pixel strength, solid strength and black color respectively.
- 3 In html, **** tag is used to insert an image into the web page. **src** defines the source path of an image , and title attribute has a value "**wikitechy**" with its styles specified in the [title~=wikitechy] of **border: 5px solid black**.

Output:

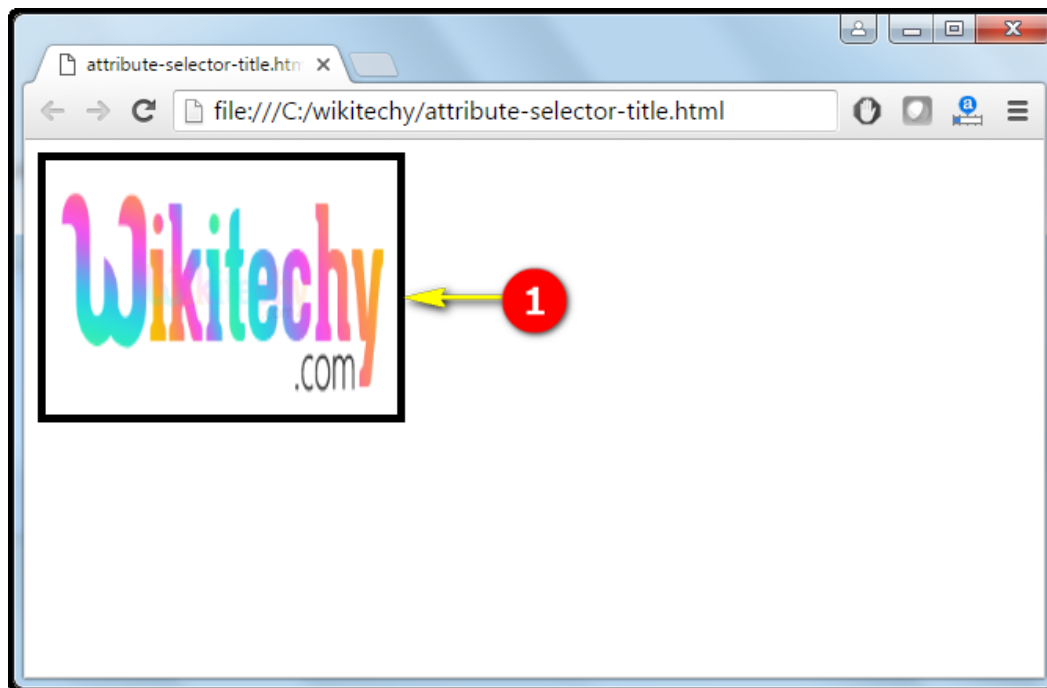

- 1 The image wikitechy has a **black color solid border**, with width of 5 pixels around it as shown in the web browser window.

