

<samp> TAG IN HTML

- <samp> tag is defined as sample output from a computer program.
- <samp> tag is also known as Phrase tag.
- Generally, the <samp> tag is displayed in the browsers with monotype font. (Such as Lucida console).
- <samp> tag supports **Global and Event attributes**.
- <samp> tag belongs to **Flow content, Palpable content,** and **Phrasing content** category.

Syntax for <samp> tag:

```
<samp>content</samp>
```

Sample coding for <samp> tag in HTML:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Wikitechy samp tag</title>
  </head>
  <body>
    <h2>HTML samp tag with example.</h2>
    <p> Wikitechy <samp> step-by-step </samp>HTML tutorial.</p>
  </body>
</html>
```




Code Explanation for <samp> tag:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Wikitechy samp tag</title>
  </head>
  <body>
    <h2>HTML samp tag with example.</h2>
    <p> Wikitechy
    1 ← <samp> step-by-step </samp>HTML tutorial.
        </p>
  </body>
</html>
```

1. <samp> element is displayed in monotype font.

Output for <samp> Tag:

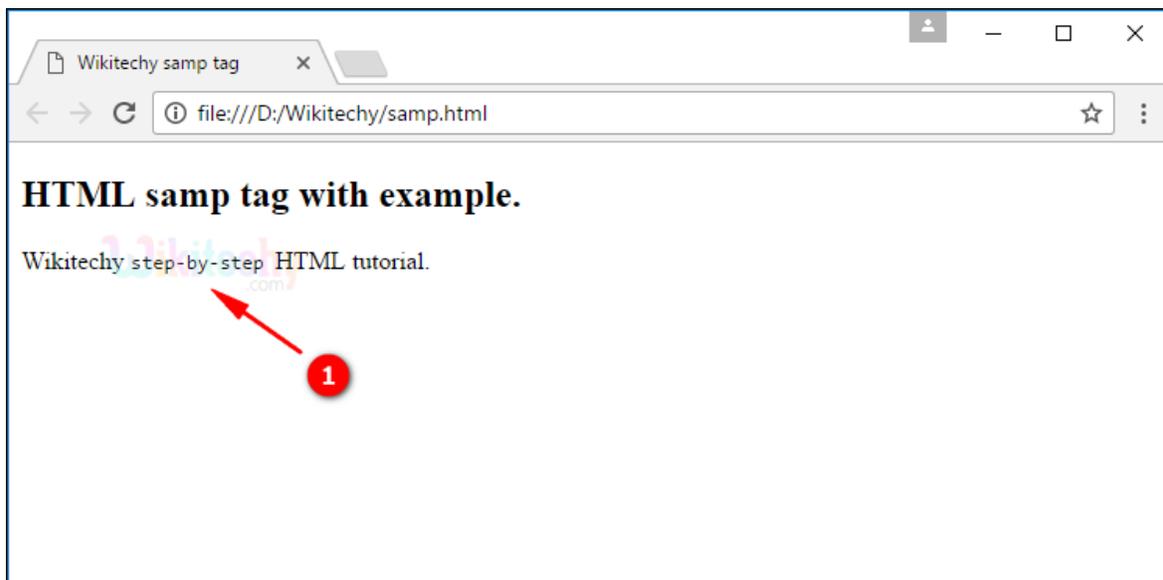

1. "step-by-step" will be displayed in different font.

Browsers support in <samp> tag:

Browser	Support
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

