

<abbr>- ABBREVIATION TAG IN HTML

- The <abbr> tag is used to define an acronym or abbreviation like "ATM" and "PIN" etc.
- The abbreviation tag supports **Global and Event attributes** in HTML.
- <abbr>tag belongs to **Flow content, Phrasing content and Palpable Content Category.**

Syntax for <abbr> tag in HTML:

```
<abbr title=" Content is here....." > </abbr>
```

Sample coding for <abbr> tag in HTML:


```
<!DOCTYPE html>
<html>
  <body>
    <h3>WIKITECHY</h3>
    <p>Everyone have
      <abbr title="Personal Index Number">PIN</abbr>
      number for their Bank account
    </p>
  </body>
</html>
```

Code Explanation for <abbr> tag in HTML:

```
<!DOCTYPE html>
<html>
  <body>
    <h3>WIKITECHY</h3>
    <p>Everyone have
      1 ← <abbr title="Personal Index Number">PIN</abbr>
        number for their Bank account
    </p>
  </body>
</html>
```

1. <abbr> tag is given to display the abbreviation of the content "Personal Index Number" (PIN).

Output for <abbr> tag in HTML:

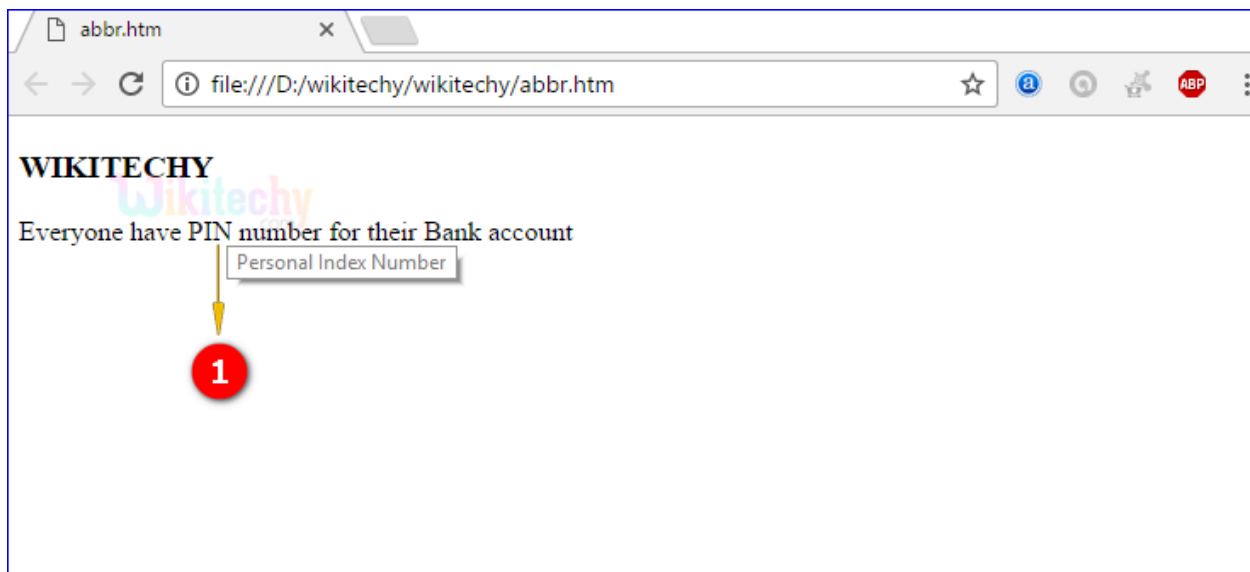

1. "Personal Index Number" is an abbreviation of PIN which is displayed like a tooltip.

Browser support for <abbr> tag in HTML:

Browser	Language Attribute
Chrome	Yes
Internet explorer / Edge	Yes
Firefox	Yes
Safari	Yes
Opera	Yes

Tips and Notes

- An abbreviation and an acronym specifies the series of the letters.
- To show the full version of the abbreviation/acronym when we move the mouse over on <abbr> element.